


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REV. A	2019	
B			
C			
D			

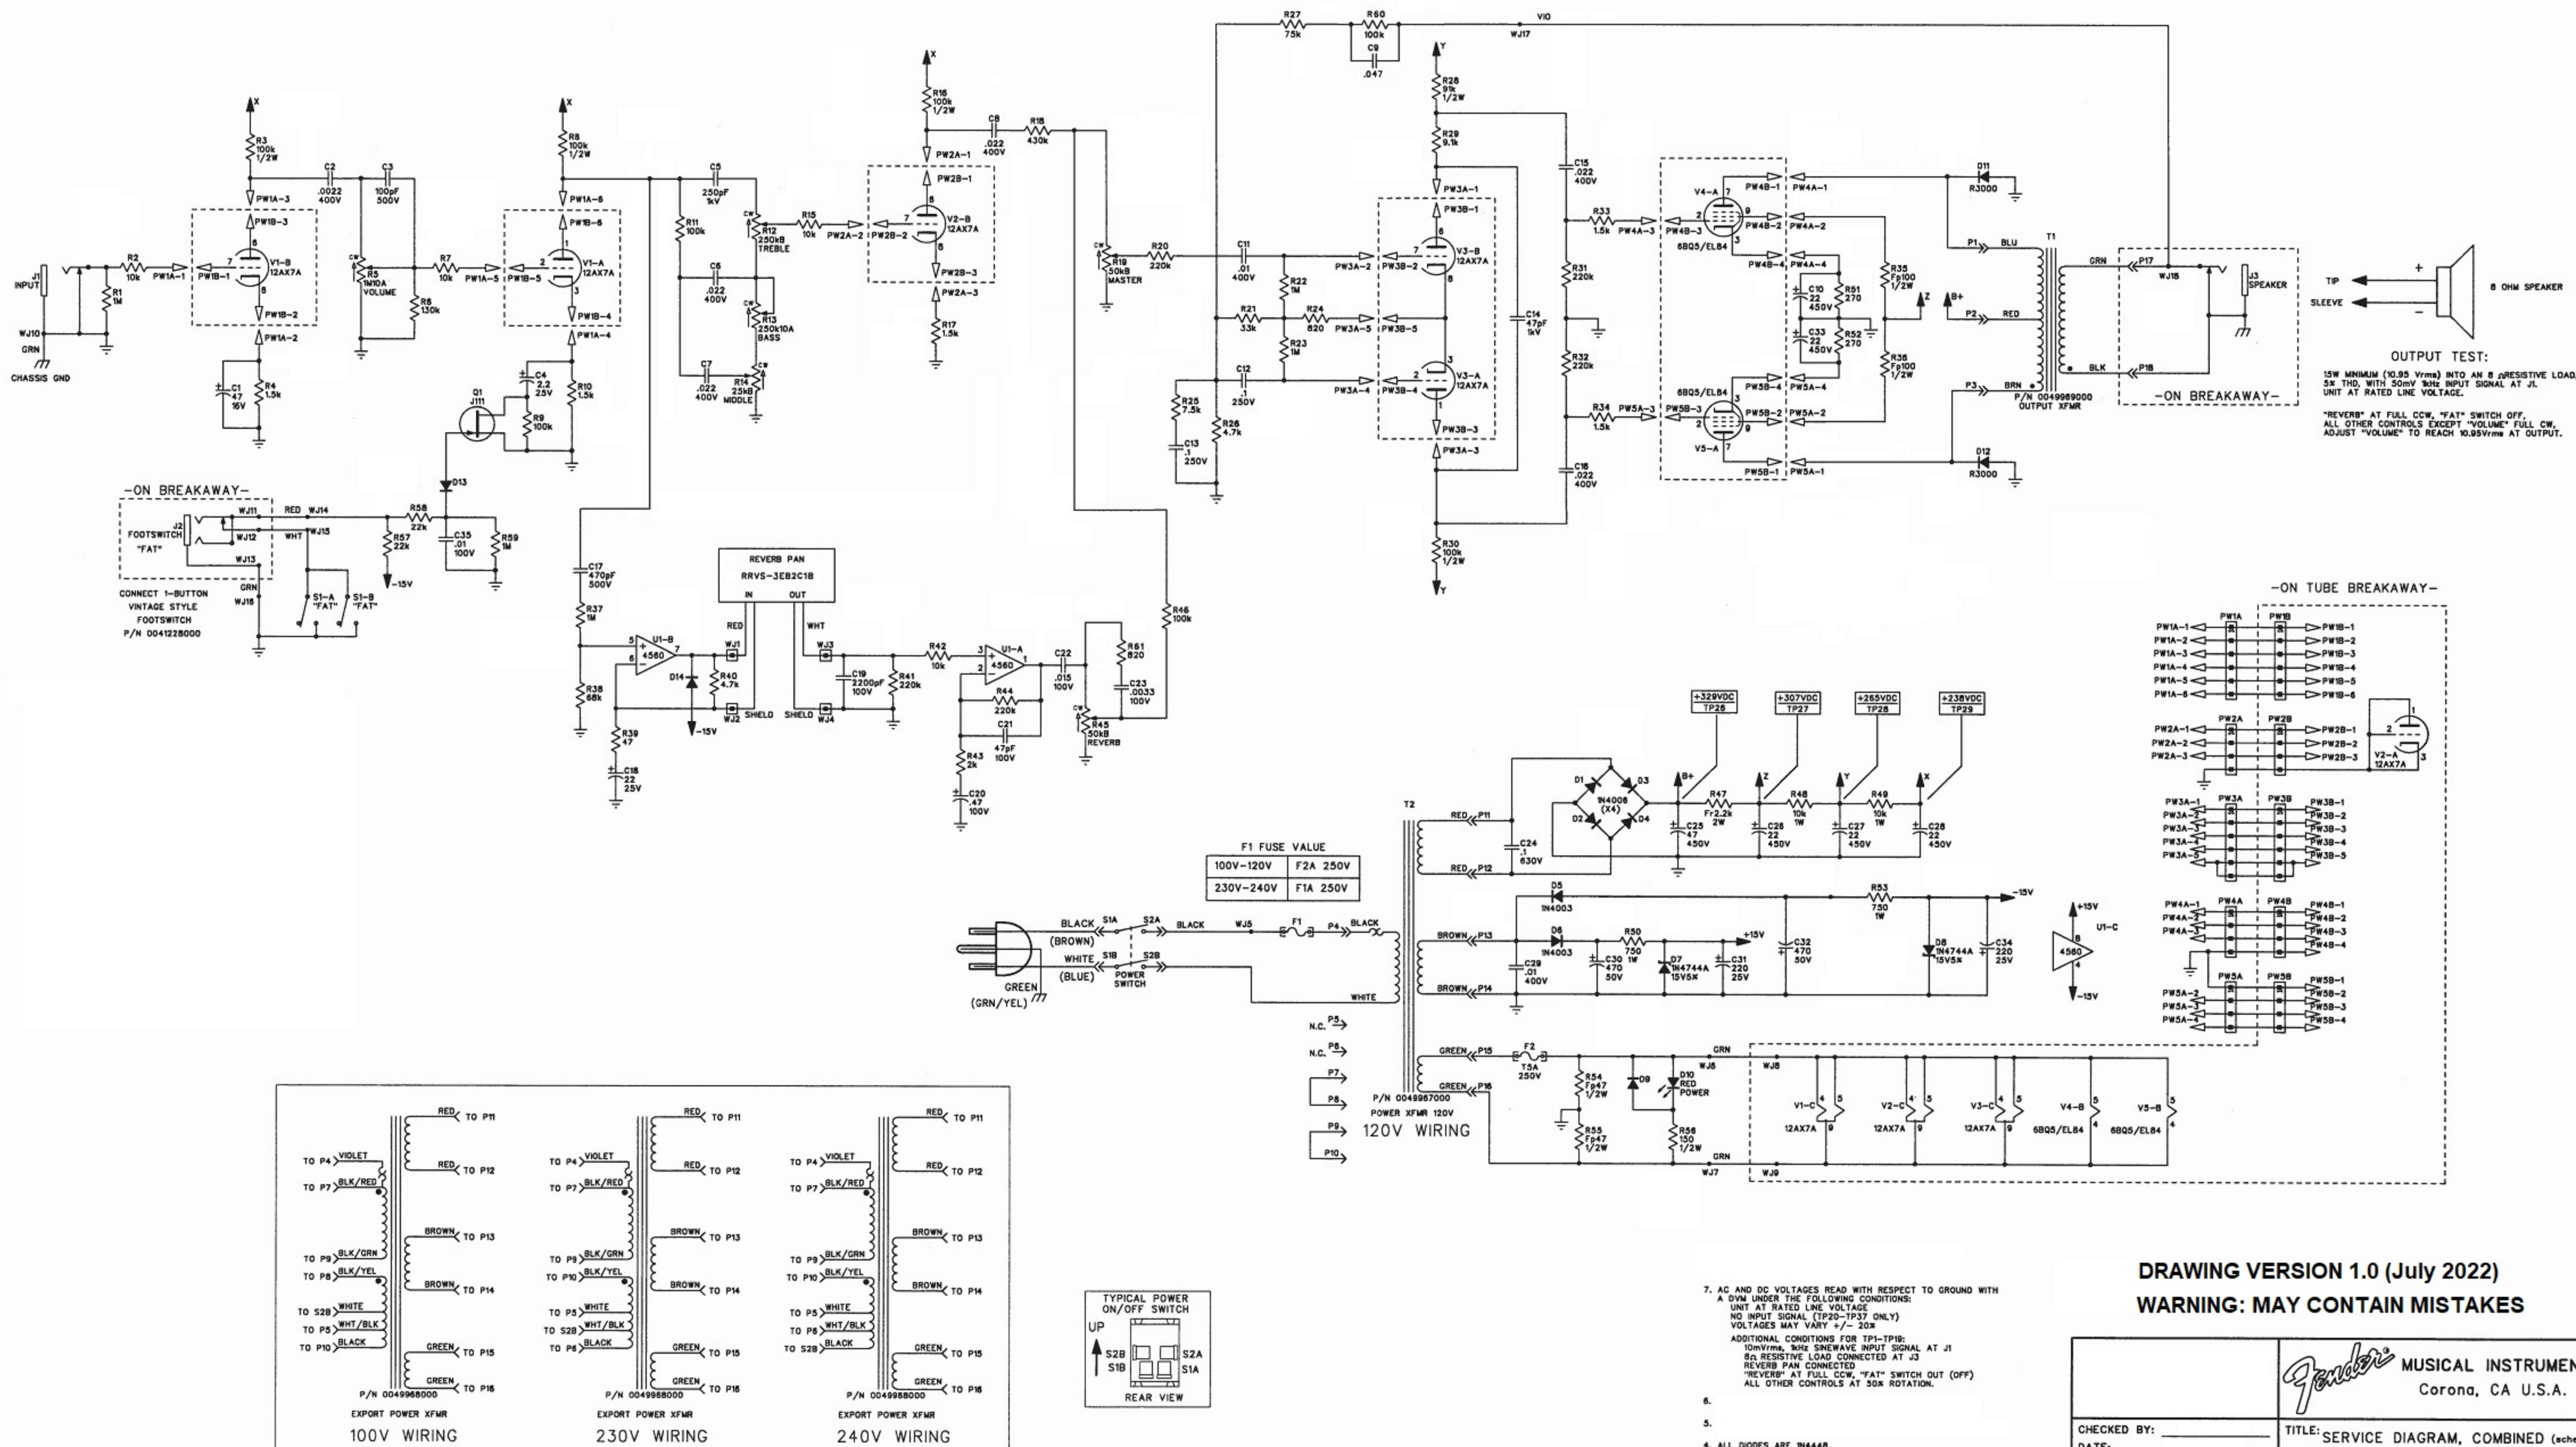

DRAWING VERSION 1.0 (July 2022)
WARNING: MAY CONTAIN MISTAKES

7. AC AND DC VOLTAGES READ WITH RESPECT TO GROUND WITH A DMM UNDER THE FOLLOWING CONDITIONS:
UNIT AT RATED LINE VOLTAGE
NO INPUT SIGNAL (TP20-TP37 ONLY)
VOLTAGES MAY VARY +/- 20%
ADDITIONAL CONDITIONS FOR TP1-TP19:
100Vrms, 100Vrms SINEWAVE INPUT SIGNAL AT J1
8. RESISTIVE LOAD CONNECTED AT J3
REVERB PAN CONNECTED
"REVERB" AT FULL CW, "FAT" SWITCH OUT (OFF)
ALL OTHER CONTROLS AT 50% ROTATION.
- 6.
- 5.
4. ALL DIODES ARE 1N4448.
3. ALL POLARIZED CAPACITORS IN uF, 20% MINIMUM.
2. ALL UNPOLARIZED CAPACITORS IN uF, 10% OR BETTER; 50V MINIMUM. (POWER SUPPLY BYPASS CAPACITORS ARE 20X).
1. ALL RESISTORS IN OHMS, 5% 1/4W.
- NOTES: (UNLESS OTHERWISE NOTED)

CHECKED BY: _____		TITLE: SERVICE DIAGRAM, COMBINED (schematic)	
DATE: _____		BLUES JUNIOR IV	
APPROVED BY: _____		SIZE: _____	
DATE: _____		DRAWING NUMBER: _____	
DRAWN: _____		ENGR: _____	
DATABASE FILE: _____		RELEASE DATE: _____	
		SHEET: 1 OF 2	

Fender® MUSICAL INSTRUMENTS
Corona, CA U.S.A.